


The NATIONAL TIME Addressable Control A/V module provides supervised addressable signal output control of indicating appliances (horns/strobes) or audio speakers. The Control module output can be configured for Style Y or Z operation. The module's *DigiComm*™ communication provides style 4, 6, or 7 wiring. The powerful *DigiComm*™ communication protocol enables reliable and accurate information to be exchanged between modules and the Fire Alarm Control Panel. The modules feature programmable status LED indicators. The module mounts in a 4" square or 2 gang box.



Features:

- 70.7VAC or 25VAC RMS Audio Output Control
- 24VDC Output 1 Amp Control
- Supervised Output Style Y or Z
- Style 4, 6 or 7 Communication via DigiComm™ loop.
- Superior *DigiComm*™ Digital Communication Protocol
- LED Indicator
- U.L. Listed

Wiring Diagrams

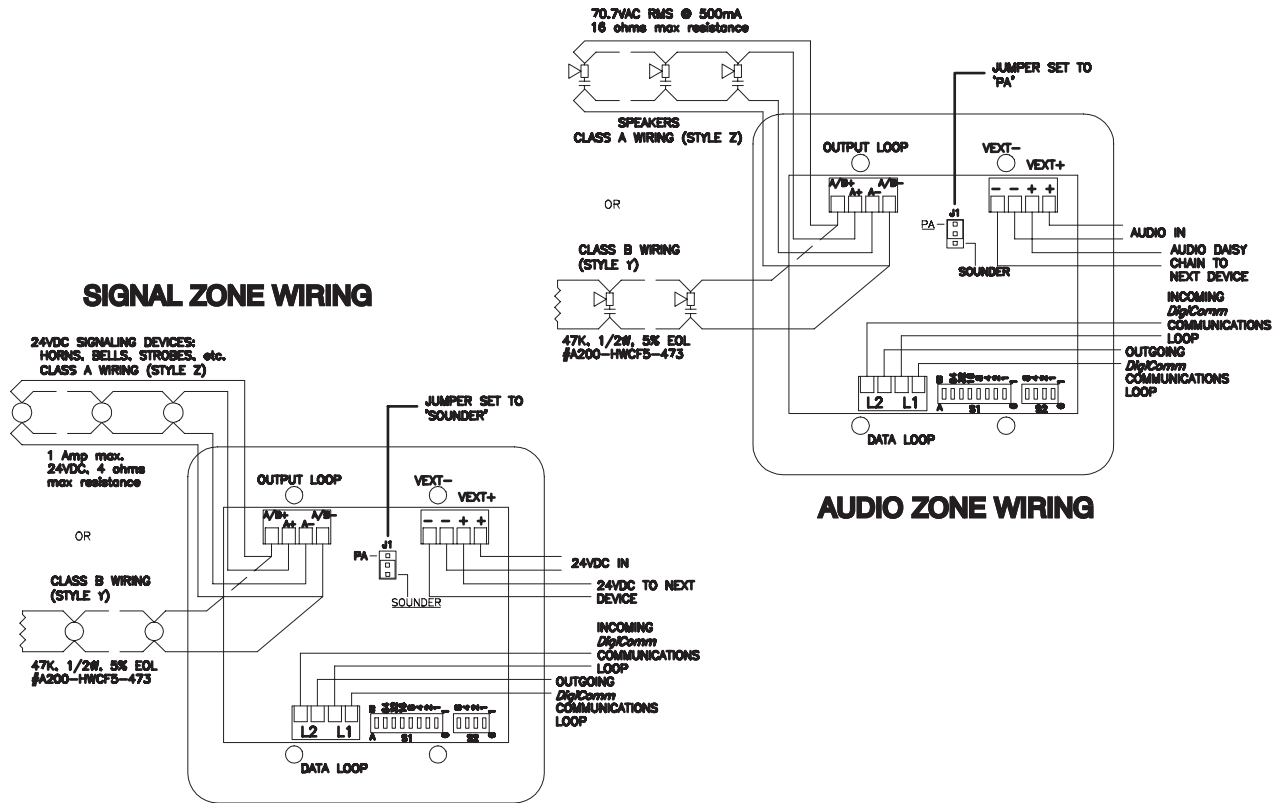

Specifications

- OUTPUT CONTACT POWER:** 24VDC @ 1A
70.7VAC/25VAC RMS @ 500mA
Style Y/Z
- SOURCE POWER:** 24VDC Regulated Power (Signal)
70.7VAC/25VAC RMS (Audio)
- DIGICOMM™ LOOP POWER:** 1mA Supervisory and 4mA Alarm (LED Active 5mA)
- COMMUNICATION:** Style 4, 6, or 7 (via DigiComm™ Communication Loop)
- FINISH:** White Polycarbonate
- DIMENSIONS:** 4.5" x 4.5" x 1.2"
- NET WT.:** 3.2 oz.
- MOUNTING:** 4" sq. or 2 Gang Electrical Box (minimum depth of 2-1/8")

Ordering Information

Part No.	Description
D900-CTRL A/V	DigiComm™ Control Module (horn/strobe/audio)