


The NATIONAL TIME Addressable Mini Monitor and Mini Priority Monitor modules provide a style B/D initiating input to monitor dry contact initiating devices. The powerful *DigiComm*™ communication protocol enables reliable and accurate information to be exchanged between the monitor modules and the Fire Alarm Control Panel. The monitor modules feature programmable status LED indicators. The Mini Priority Monitor Module utilizes the *DigiComm*™ communication interrupt protocol to provide faster device response. It is ideal for pull station applications.



## Features:

- Addressable 2 Wire Initiating Circuit
- Supervised Style B/D Input
- Style 4, 6 or 7 Communication Wiring
- Priority Interrupt for Faster Response Time (D900-MINI-P)
- Superior *DigiComm*™ Digital Communication Protocol
- LED Indicator
- U.L. Listed

## Wiring Diagrams

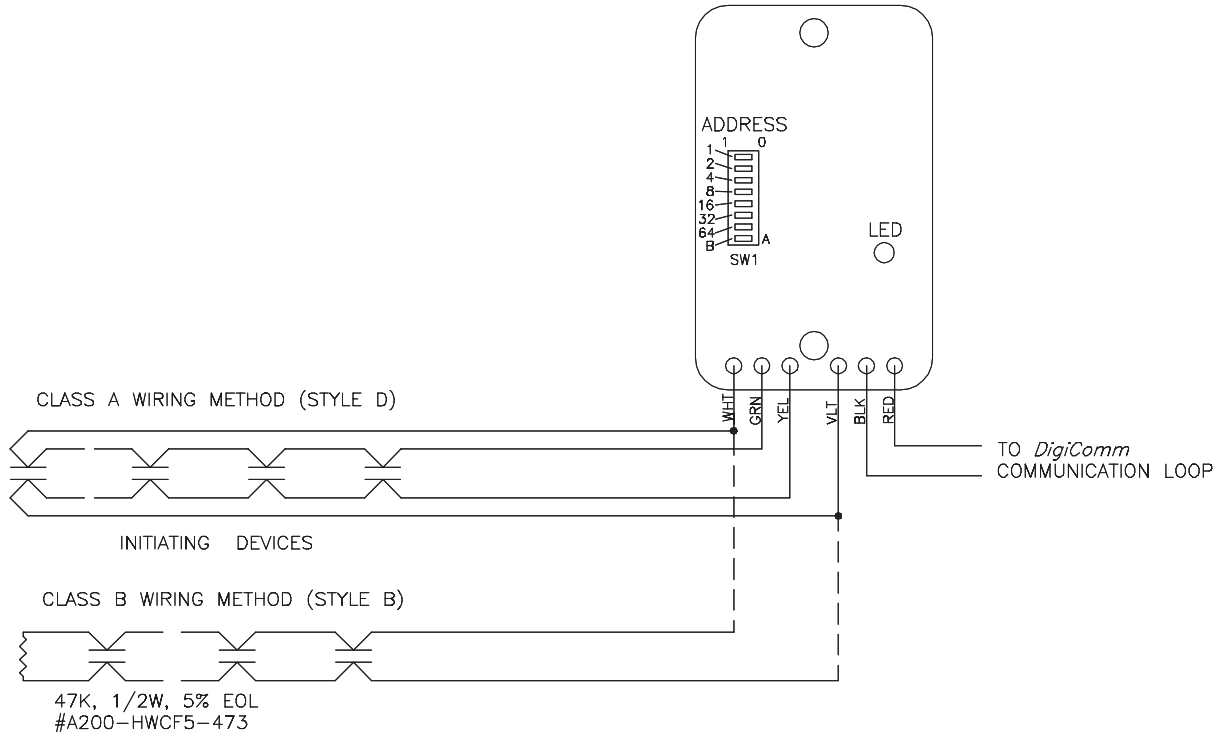

## Specifications

**INPUT:** Style B/D

Dry Contact Initiating Devices  
Max Loop Resistance 50 ohms

**DIGICOMM™ LOOP POWER:** Alarm and Supervisory Currents 600uA (LED Active 5mA)

**COMMUNICATION:** Style 4, 6 or 7 (via the *DigiComm*™ Communication Loop)

**FINISH:** White Polycarbonate

**DIMENSIONS:** 1.8" x 3" x .55"

**NET WT.:** 1.5 oz.

**MOUNTING:** With Pull Station: 4" sq. with Single Gang Plaster Ring  
Stand Alone: 4" sq. or octagon, 2 Gang or Deep Utility Box

## Ordering Information

Part No.	Description
D900-MINI-P	<i>DigiComm</i> ™ Mini Priority Monitor Module
D900-MINI	<i>DigiComm</i> ™ Mini Monitor Module